



COREXOM R6490WGQ SOM

DATASHEET

Rev. V0.0 (Draft)

2024/01/18



Revision History

Rev.	Date	Description
0.0	2024/01/18	Draft

CRI/Preliminary Datasheet

About This Document

- Illustrations in this documentation might look different from your product.
- Depending on the model, some optional accessories, features, and software programs might not be available on your device.
- Depending on the version of operating systems and programs, some user interface instructions might not be applicable to your device.
- Documentation content is subject to change without notice. Coretronic Reality Inc. (CRI) makes constant improvements on the documentation of your computer, including this guidebook.

Table of Contents

1.	Introduction	1
1.1	Features	1
1.2	Block Diagram	3
1.3	Major components location.....	4
1.4	SMT assembly guide and Stencil design.....	4
2.	Interface Specification.....	5
2.1	Interface pin type definition	5
2.2	SOM Interface LGA pins Map.....	6
2.3	LGA interface pin description	9
2.3.1	Power supply	9
2.3.2	Camera interface.....	11
2.3.3	Display interface.....	12
2.3.5	Audio Interface	13
2.3.6	USB & DisplayPort interface	15
2.3.7	PCIe interface	16
2.3.8	SDIO interface	16
2.3.9	SSC interface.....	17
2.3.10	QUP interface	17
2.3.11	Debug UART interface	19
2.3.12	Power on interface	19
2.3.13	Reset interface	19
2.3.14	Keys interface	20
2.3.15	Battery interface	20
2.3.16	PMIC GPIO	20
2.3.17	PWMs and LED current driver interface.....	22
2.3.18	RF interface.....	23
2.4	Pin Summary.....	24
3.	Electrical Characteristics	25

3.1	Absolute Maximum Ratings	25
3.2	Operating conditions	25
3.3	Output Power	25
3.4	GPIO characteristics	26
4.	Mechanical Specification	27
4.1	SOM Mechanical dimensions.....	27
4.2	Weight	28
4.3	Thermal Characteristics.....	28
5.	Product Marking, Ordering and Shipping Info.	29

CRI/Preliminary Datasheet

1. Introduction

CRI COREXOM RB3G2v1 SOM (System on Module) is a high-performance intelligent module, integrating Android, based on Qualcomm® Snapdragon™ QCS6490 SoC. It integrates the advanced 6 nm processor with superior performance and power efficiency, as well as high AI capability (12.5 TOPS). It supports Wi-Fi 6E with DBS & Long Range Bluetooth, and is featured with 5 x 4-lane MIPI CSI D-PHY (2 of them compatible to support 3-lane MIPI CSI C-PHY which is up to 48M camera). It also has a rich set of peripheral interfaces, including both USB 3.1 and USB 2.0 concurrency and PCIe.

The RB3G2v1 SOM is a high performance AIoT SOM for building Handheld Devices, Industrial Robots, Service Robots, Drones and Digital Signage, providing customers with hardware interfaces and software SDK to validate functions and build the prototype quickly, and also provide for mass production.

1.1 Features

The following table shows the detailed features of QCS6490 and RB3G2v1 SOM

Key features of QCS6490 SoC

Item	Description
CPU	Qualcomm® Kryo™ CPU 670 built on Arm v8 Cortex technology <ul style="list-style-type: none">● Kryo Gold plus : high-performance core up to 2.7 GHz● Kryo Gold : three high-performance cores at 2.4 GHz● Kryo Silver : four low-power cores at 1.9 GHz
GPU	<ul style="list-style-type: none">● Adreno GPU 642L● OpenGL ES 3.2, Vulkan 1.x● OpenCL 2.0, DX FL12
DSP and AI	Compute Hexagon DSP with dual HVX and Hexagon Co-processor (Hexagon CP) 2.0 and Hexagon Tensor Accelerator <ul style="list-style-type: none">● Used for video playback enhancements, virtual reality, computer vision, camera snapshot enhancements, video capture enhancement, machine learning, and so on● The Hexagon CP is a vision and imaging hardware accelerator to offload and accelerate
Display	Adreno DPU 1075 : <ul style="list-style-type: none">● Maximum resolution for internal panel : FHD+ 144 Hz QCLTM, HDR10+, WCG, improved● inline rot, rounded corner, SPR, De-Mura, CWB-ROI● One 4-lane; DSI D-PHY 1.2 or C-PHY 1.2; VESA DSC 1.2● 4K@60FPS display support over DisplayPort (USB3 + DisplayPort

Item	Description
	concurrency)
Adreno VPU (Video Processing Unit)	<p>Adreno VPU 633 – fifth-generation UHD video processing unit</p> <ul style="list-style-type: none"> ● Video Encode : Up to 4K@30fps for H.264/H.265 ● Video Decode : Up to 4K@60fps for H.264/H.265/VP9 ● Video concurrency: 1080P@60FPS decode and 1080P@60FPS encode/4K@30FPS decode + 1080P@30FPS encode ● HDR playback: Support for HDR10 and HDR10+ ● HFR capture: 720P@480FPS or 1080P@240FPS
Camera support	<p>Qualcomm Spectra 570L: 36 + 22MP@30FPS/3x 22MP@30FPS ZSL</p> <p>Qualcomm Spectra 570L ISP supports connectivity to multiple cameras due to five C-PHY/D-PHY interfaces.</p> <ul style="list-style-type: none"> ● Real-time sensor input resolution: 22 + 22 + 22 MP ● Three IFE + two IFE lite, up to eight sensors, five concurrent MIPI CSI configurable in 4 + 4 +4 + 4 + 4 configurations ● 5x D-PHY v1.2 /C-PHY v1.2
WLAN/BT	<p>The WCN6856, Tri-band 2x2 MIMO DBS 802.11ax + Bluetooth 5.2</p> <ul style="list-style-type: none"> ● supports 802.11ax Wi-Fi and Bluetooth 5.2. ● supports simultaneous operation on 2.4 GHz and 5 GHz or 6 GHz (DBS)


Key features of R6490WGQ SOM

Item	Description
Processor	Snapdragon™ QCS6490
Memory	LPDDR4X 8GB + UFS2.x 128GB
Connectivity	802.11 ax over PCIe with DBS, 2x2 MIMO (Wi-Fi 6E), Bluetooth 5.2
Display I/F	1 x MIPI-DSI 4-lane, 4K@60fps display support over DisplayPort
Camera I/F	5x 4 data lane MIPI CSI D-PHY (2 of them compatible with 3-trio MIPI CSI C-PHY up to 48M camera)
Audio I/F	<ul style="list-style-type: none"> ● 2x SoundWire interface ● 3x DMIC interface
USB	1x USB 3.1 with DisplayPort 1x USB 2.0
PCIe	1x 2-lane PCIe Gen3.0
Peripheral (QUP) I/F	<ul style="list-style-type: none"> ● 1x SDC for SD card ● QUPs (UART/I2C/SPI) ● GPIOs
Package	LGA

Item	Description
Dimensions	42.5mm x 35.5mm x 2.7mm
Operation System	Android 13, Ubuntu, Windows


1.2 Block Diagram

RB3G2v1 SOM6490LGAv1 and application interposer Hardware Block diagram is shown in below as reference

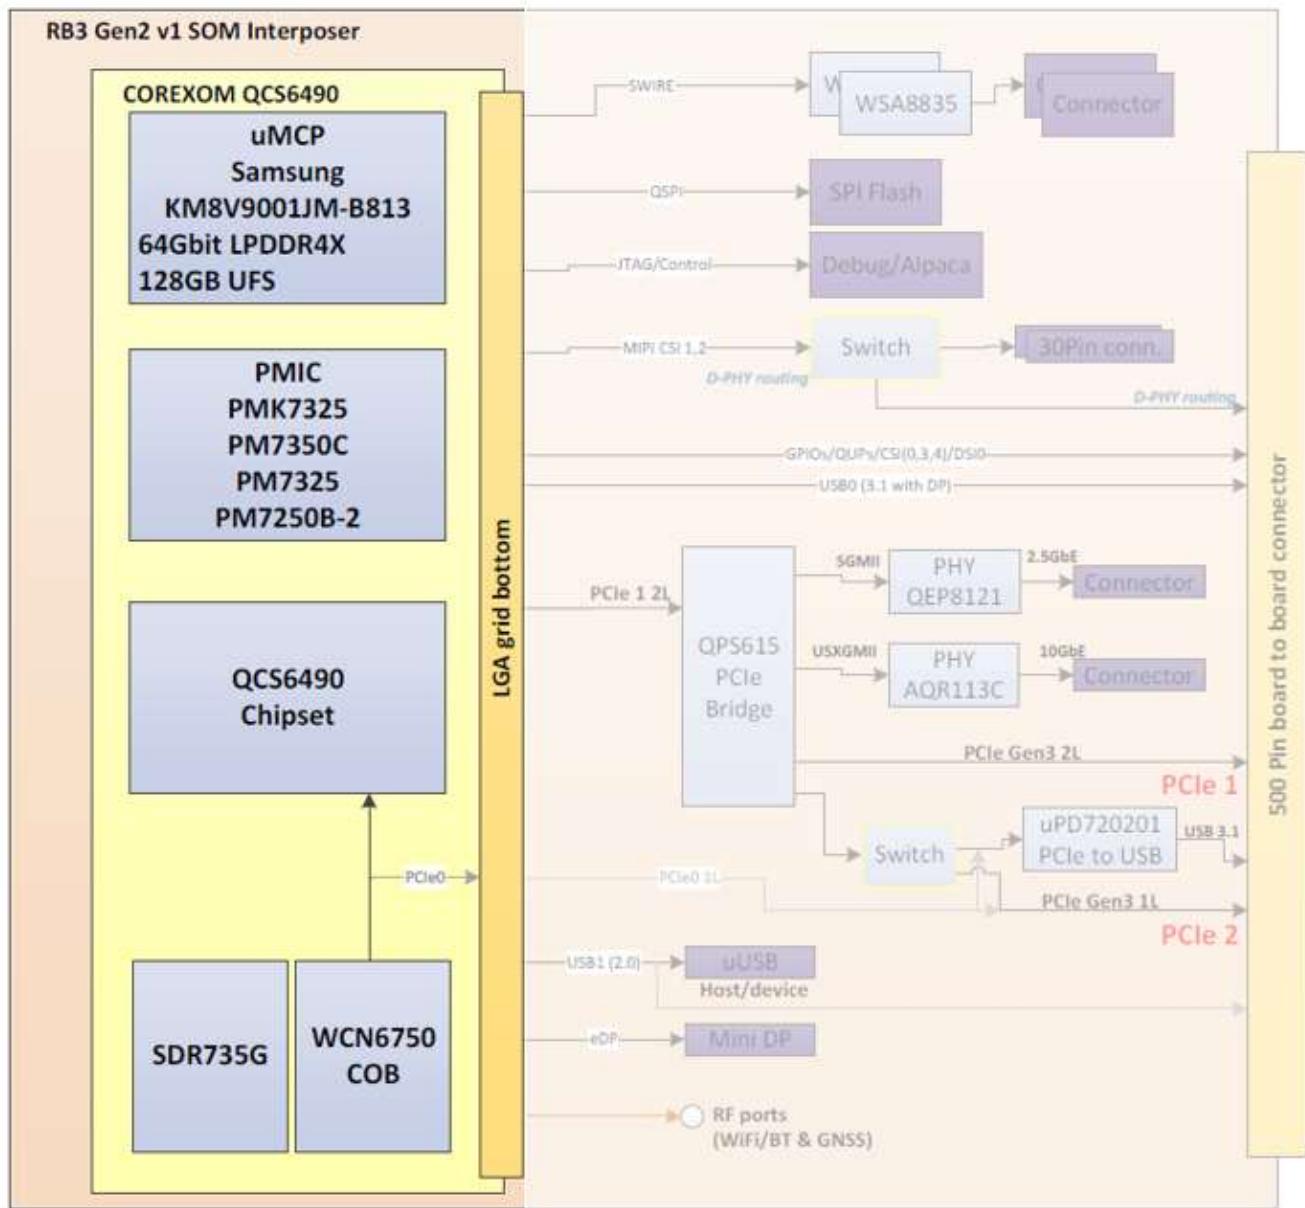

1.3 Major components location

Below picture identify the major components and connectors found on the top of the COREXOM RB3G2v1 SOM6491LGAv1

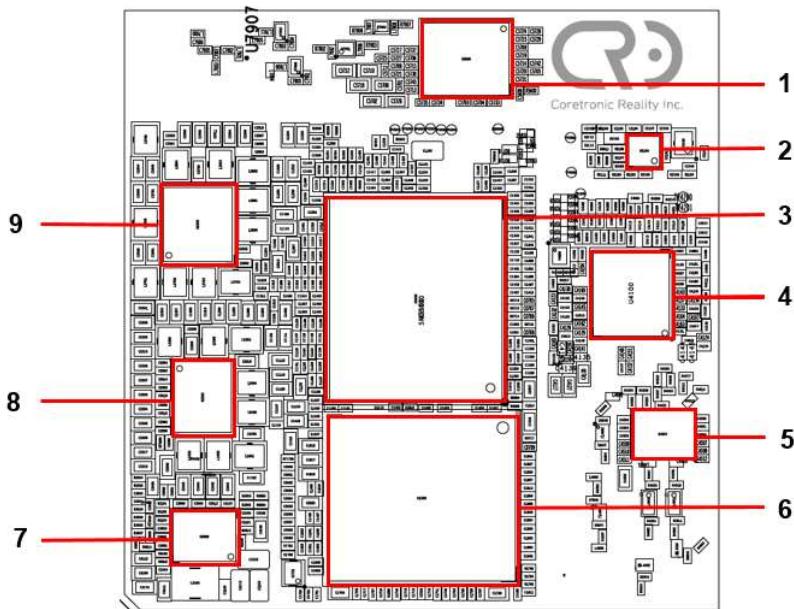

1	SDR735G GNSS	6	uMCP
2	PMK7325 PMIC		LPDDR4 8GB + UFS 128GB
3	QCS6490 SoC	7	PM7250B PMIC
4	WCN6750 WLAN	8	PM7325 PMIC
5	QM45392TR13 RF-FEM	9	PM7350C PMIC

1.4 SMT assembly guide and Stencil design

(TBD).

2. Interface Specification

This chapter introduces all the interfaces definition, purpose to guide developer easy to design and verification on CRI COREXOM R6490WGQ SOM.

2.1 Interface pin type definition

Type	Description
AI	Analog input
AO	Analog output
B, BIO	Bidirectional digital CMOS I/O
CSI	MIPI CSI related circuits and I/O
DSI	MIPI DSI related circuits and I/O
DI	Digital CMOS input
DO	Digital CMOS output
H	High voltage tolerance
nppdpu	Programmable pull resistor. The default pull direction is indicated using capital letters, and options following the colon (:) NP: pdpu = default no-pull PD: nppukp = default pull-down PU: nppdkp = default pull-up KP: nppdpu = default keeper
KP	Contains an internal weak keeper device (cannot drive external buses)
NP	Contains no internal pull
OD	Open drain
PU	Contains an internal pull-up device
PD	Contains an internal pull-down device
PI	Power input
PO	Power output
PX3	Power for PX3 group by 1.8V
PX2	Power for SDC PX2 group by 2.95V (option 1.8V)
USB	USB SS/HS/FS related circuits and I/O
PCIe	PCIe related circuits and I/O

2.2 SOM Interface LGA pins Map

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
BE			C401	18	AN401	GND	19	P001	20	GND	21	GND	22	C401	23	P001	24	GND	25	P001	26	P001	27	P001	28			
BD				C401	29	GND	30	GND	31	GND	32	GND	33	C401	34	GND	35	GND	36	GND	37	GND	38	GND	39	GND	40	GND
BC					NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
BB						NC																						
BA																												
AC																												
AB																												
AA																												
Y																												
W																												
V																												
U																												
T																												
R																												
P																												
N																												
M																												
L																												
K																												
J																												
H																												
G																												
F																												
E																												
D																												
C																												
B																												
A																												

Power	RF ANT	DSI
GND	USB & CC & SBU	eDP
PON & Battery I/F	PCIE & Control	SDC
	CSI & CCI & MCLK	UIM

SOM Top View see through

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
BE	GND1		GND	RF_ANT_GNSS	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND
BD			GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND
BC	GND	GND	NC	NC	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND
BB	GND	GND												
BA	GND	GND												
AC	GND3		VREG_BO_B	VREG_L8_C_1P8	SM_GPIO_63	SM_GPIO_60	PCIE1_TX_0_P	PCIE1_RX_0_P	PCIE1_TX_1_P	PCIE1_RX_1_P	PCIE1_RXE_FCLK_P	GND	USB0_SS_RX0_M	USB0_SS_RX0_M
AB			VREG_BO_B	VREG_L7_C_3P0	SM_GPIO_61	SM_GPIO_141	PCIE1_TX_0_M	PCIE1_RX_0_M	PCIE1_TX_1_M	PCIE1_RX_1_M	PCIE1_RXE_FCLK_M	GND	USB0_SS_RX0_P	USB0_SS_RX0_P
AA	FLASH_LE_D1	FLASH_LE_D1	IRIS_RED	IRIS_GRE	VREG_L3_C_3P0	SM_GPIO_62	UIM2_RES_ET	UIM2_PRE_SENT	UIM1_RES_ET	UIM1_PRESENT	USB_SS_H_HS_L_SEL	GND	GND	GND
Y	FLASH_LE_D2	FLASH_LE_D2	IRIS_BLU_E	VREG_L6_C_2P96	VREG_L9_C_2P96	PM_C_GPO_04	UIM2_DA_TA	UIM2_CL_K	UIM1_DA_TA	UIM1_CL_K	SM_GPIO_142	GND	GND	PCIE1_RXE_SET_N
W	GND	PM_C_GPO_01	VREG_L11_C_2P8	VREG_L2_C_1P8	PM_C_GPI_03									
V	PM_C_GPO_06	VREG_L5_C_1P8_3P0	VREG_L4_C_1P8_3P0	PM_C_GPO_02			DSI0_B0_LN0_M	DSI0_A0_LN0_P	GND	SDC2_DA_TA_2	SDC2_DA_TA_0	GND	GND	GND
U	PM_C_GPO_07	VREG_L12_C_1P8	VREG_L13_C_3P0	PM_C_GPO_08			DSI0_B2_LN2_M	DSI0_A2_LN2_P	GND	SDC2_DA_TA_1	SDC2_DA_TA_3	SM_GPIO_45	SM_GPIO_47	SM_GPIO_54
T	SM_GPIO_59	SM_GPIO_58	PM_C_GPO_05	PM_C_GPO_09			DSI0_NC_LN3_M	DSI0_C2_LN3_P	GND	SDC2_CL_K	SDC2_CM_D	SM_GPIO_34	SM_GPIO_44	SM_GPIO_52
R	SM_GPIO_56	SM_GPIO_57	SM_GPIO_102	SM_GPIO_96			DSI0_A1_LN1_M	DSI0_C0_LN1_P	SM_GPIO_100	GND	SM_GPIO_33	SM_GPIO_35	SM_GPIO_46	
P	GND	GND	SM_GPIO_48	SM_GPIO_97			DSI0_C1_CLK_M	DSI0_B1_CLK_P	GND	GND				
N	SM_GPIO_80	VREG_L17_B_1P8	SM_GPIO_41	SM_GPIO_98			SM_GPIO_101	SM_GPIO_81	GND	GND				
M	GND	SM_GPIO_51	SM_GPIO_40	SM_GPIO_99			FORCED_USB_BOOT	PHONE_O_N_N	GND	SD_CARD_DET_N				
L	VREG_SY_S_1P8	SM_GPIO_50	PM_B_AM_UX4	SM_GPIO_103			KYPD_VOL_UP_N	PM_RESIN_N	GND	SNS_I3C0_SCL				
K	SM_GPIO_49	SM_GPIO_42	PM_B_AM_UX2	PM_B_GPO_09			EDP0_AU_X_P	EDP0_AU_X_M	GND	SNS_I3C0_SDA				
J	VCOIN	VCOIN	SM_GPIO_104	PM_B_GPO_08			EDP0_TX0_P	EDP0_TX0_M	GND	SNS_I2C_SCL	SM_GPIO_163	SM_GPIO_148	SM_GPIO_145	SM_GPIO_150
H	SM_GPIO_43	VREG_L16_B_1P2	GND	CBL_PWR_N			EDP0_TX1_P	EDP0_TX1_M	GND	SNS_I2C_SDA	SM_GPIO_154	SM_GPIO_164	SM_GPIO_149	SM_GPIO_151
G	USB0_HS_DM	PM_USB_OPTION	PM_A_GPO_04	PM_A_GPO_02			EDP0_TX2_P	EDP0_TX2_M	GND	GND	PM_A_GPO_10	SM_GPIO_155	SM_GPIO_166	SM_GPIO_144
F	USB0_HS_DP	VIB_DRV_P	VBATT_V_SNS_M	PM_A_GPO_07			EDP0_TX3_P	EDP0_TX3_M	PM_A_GPO_03	PM_A_GPO_01	PM_A_GPO_12	GND	SM_GPIO_165	SM_GPIO_147
E	USB_THE_RM	PM_A_GPO_08	VBATT_V_SNS_P	PM_A_GPO_11										
D	VPH_PWR	VPH_PWR	VPH_PWR	VBATT_O_PT_ISNS_P	PM_A_GPO_06	VBATT_O_PT_ISNS_M	SMB_EN	PM_A_GPO_09	GND	PMB_DC_IN_PON	PMB_DC_IN_PSNS	PMB_DC_IN_EN	GND	GND
C	VPH_PWR	VPH_PWR	VPH_PWR	BATT_ID	VBATT_PACK_SNS_M	BATT_THERM	SMB_THE_RM	SMB_ICH_G_FB	PM_A_GPO_05	PMB_MID_CHG	PMB_MID_CHG	PMB_MID_CHG	PMB_MID_CHG	GND
B	GND5			GND	VBATT	VBATT	VBATT	VBATT	GND	USB_VBU_S	USB_VBU_S	USB_VBU_S	USB_VBU_S	GND
A				GND	VBATT	VBATT	VBATT	VBATT	GND	USB_VBU_S	USB_VBU_S	USB_VBU_S	USB_VBU_S	GND
	1	2	3	4	5	6	7	8	9	10	11	12	13	14

15	16	17	18	19	20	21	22	23	24	25	26	27	28		
GND	GND	GND	GND	GND	GND	PCIE0_RX_SET_N	PCIE0_RX_FCLK_P	PCIE0_TX_P	PCIE0_RX_P	GND	GND	GND2		BE	
GND	GND	GND	GND	GND	PCIE0_CLK_REQ_N	PCIE0_WAKE_N	PCIE0_RX_FCLK_M	PCIE0_TX_M	PCIE0_RX_M	GND	GND			BD	
GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	BC	
												GND	GND	BB	
												GND	GND	BA	
USB0_SS_TX1_M	USB0_SS_RX1_P	USB0_DP_AUX_M	USB1_HS_DP	GND	DBG_UART_RX	FAULT_N	CSI0_C2_L_N3_M	CSI0_A2_L_N2_M	CSI0_B1_L_N1_M	CSI0_C0_L_N0_M	CSI0_A0_CLK_M	GND4		AC	
USB0_SS_TX1_P	USB0_SS_RX1_M	USB0_DP_AUX_P	USB1_HS_DM	GND	DBG_UART_TX	SM_GPIO_21	CSI0_B2_L_N3_P	CSI0_C1_L_N2_P	CSI0_A1_L_N1_P	CSI0_B0_L_N0_P	CSI0_NC_CLK_P			AB	
GND	GND	GND	SM_GPIO_129	SM_GPIO_124_RFFE_3_DATA	SM_GPIO_120_RFFE_1_DATA	SM_GPIO_118_RFFE_0_DATA	SM_GPIO_131	GND	SM_GPIO_20	SM_GPIO_130	LNBCLK_2	CSI1_C2_L_N3_M	CSI1_B2_L_N3_P	AA	
PCIE1_WA KE_N	PCIE1_CLK_REQ_N	APPs_I2C_SCL	APPs_I2C_SDA	SM_GPIO_123_RFFE_3_CLK	SM_GPIO_119_RFFE_1_CLK	SM_GPIO_117_RFFE_0_CLK	GND	GND	GND	SM_GPIO_25	CSI1_A2_L_N2_M	CSI1_C1_L_N2_P	Y	W	
										PMK_GPIO_0_02	NC	CSI1_B1_L_N1_M	CSI1_A1_L_N1_P	V	
GND	GND	GND	GND	GND	CCI_I2C0_SDA	CCI_I2C0_SCL	CCI_I2C1_SCL			PMK_GPIO_0_01	SM_GPIO_24	CSI1_C0_L_N0_M	CSI1_B0_L_N0_P	U	
SM_GPIO_38	SM_GPIO_39	GND	GND	GND	CCI_I2C3_SCL	SM_GPIO_77	CCI_I2C1_SDA			GND	NC	CSI1_A0_CLK_M	CSI1_NC_CLK_P	T	
SM_GPIO_36	SM_GPIO_37	GND	GND	GND	CCI_I2C3_SDA	CCI_I2C2_SDA	CCI_I2C2_SCL			NC	SM_GPIO_122_BOOT_CONFIG	CSI2_B2_L_N3_P	CSI2_C2_L_N3_M	R	
SM_GPIO_53	SM_GPIO_55	GND	GND	GND	GND	GND	GND	GND		SM_GPIO_9	SM_GPIO_78	CSI2_C1_L_N2_P	CSI2_A2_L_N2_M	P	
					GND	GND	GND	GND		GND	SM_GPIO_90	CSI2_A1_L_N1_P	CSI2_B1_L_N1_M	N	
				CAM_MC_LK2	GND	GND	GND			GND	GND	CSI2_B0_L_N0_P	CSI2_C0_L_N0_M	M	
					GND	CAM_MC_LK0	GND	GND		WCN_SDR_TXEN_TO_LAA	GND	GND	CSI2_NC_CLK_P	L	
					SM_GPIO_32	GND	CAM_MC_LK3	CAM_MC_LK1		WCN_SDR_LAA_TO_TXEN	SM_GPIO_8	GND	CSI3_B2_L_N3_P	CSI3_C2_L_N3_M	K
					SM_GPIO_107	SM_GPIO_108	SM_GPIO_6	SM_GPIO_132		WCN_SDR_TXEN_TO_N79	SM_GPIO_7	GND	CSI3_C1_L_N2_P	CSI3_A2_L_N2_M	J
SM_GPIO_152	GND	SLEEP_CLK	GND	SM_GPIO_105	SM_GPIO_106	GND	SM_GPIO_17			WCN_SDR_N79_TO_TXEN	GND	GND	CSI3_A1_L_N1_P	CSI3_B1_L_N1_M	H
SM_GPIO_153	GND	GND	GND	GND	CAM_MC_LK4	GND	SM_GPIO_16			CSI4_C2_L_N3_M	CSI4_B2_L_N3_P	CSI4_B0_L_N0_P	CSI4_C0_L_N0_M	G	
SM_GPIO_146	GND	GND	GND	SM_GPIO_0	SM_GPIO_1	GND	SM_GPIO_19			CSI4_A2_L_N2_M	CSI4_C1_L_N2_P	CSI3_NC_CLK_P	CSI3_A0_CLK_M	F	
SM_GPIO_158	SM_GPIO_156	SM_GPIO_157	GND	SM_GPIO_136	SM_GPIO_137	SM_GPIO_138	SM_GPIO_18			CSI4_B1_L_N1_M	CSI4_A1_L_N1_P	GND	GND	E	
										CSI4_C0_L_N0_M	CSI4_B0_L_N0_P	GND	GND	D	
USB0_CC2	GND	GND	GND	GND	SM_GPIO_15	SM_GPIO_14	SM_GPIO_12	GND	GND	CSI4_A0_CLK_M	CSI4_NC_CLK_P	GND	ANT_2G_5_G_CH1	C	
USB0_CC1	GND	GND	GND	SM_GPIO_13	SM_GPIO_83	GND	GND	GND	GND	GND	GND	GND	GND	B	
USB0_SBU_2	GND	GND	GND	VREG_L18_B_IP8	SM_GPIO_93	GND	GND	GND	GND	GND	GND	GND6		A	
USB0_SBU_1	GND	GND	GND	VREG_L18_B_IP8	GND	GND	ANT_BT_3_RD	GND	GND	ANT_2G_5_G_CH0	GND				
15	16	17	18	19	20	21	22	23	24	25	26	27	28		

2.3 LGA interface pin description

2.3.1 Power supply

Below table describes all interface of SOM power supply

Pin name	Pin #	Type	Description
VBATT	A5,A6,A7,A8,B5,B6,B7, B8	PI,PO	Power supply input for SOM. Battery voltage node, output for charging, and input for all operations.
VPH_PWR	C1,C2,C3,D1,D2,D3	PO	Primary system supply node
USB_VBUS	A10,A11,A12,A13,B10, B11,B12,B13	PO,PI	Power entry node for the charger. USB output during USB-OTG operation.
VCOIN	J1,J2	PI,PO	Coin-cell charge and supply recommend to use 22uF x 3 for VCOIN
VREG_BOB	AB3,AC3	PO	Buck-boost output 3.3V@1A (will increase to 3.6V during the bootup of the SOM)
VREG_L18B_1P8	A19,B19	PO	PX3, 1.8V Just for GPIO pull-up
VREG_L2C_1P8	W4	PO	MEMS_DMIC_VDD, 1.62V~1.98V, 1.8V type
VREG_L3C_3P0	AA5	PO	Touch screen, 2.7V~3.54V, 3V type
VREG_L7C_3P0	AB4	PO	Sensors, 2.7V~3.54V, 3V type
VREG_L8C_1P8	AC4	PO	Sensors, 1.62V~2V, 1.8V type
VREG_L11C_2P8	W3	PO	Connectivity, 1.65V~3.54V, 2.8V type
VREG_L12C_1P8	U2	PO	OLED_VDDIO, 1.62V~1.98V, 1.8V type
VREG_L13C_3P0	U3	PO	OLED_VCI, 2.7V~3.54V, 2.8V type
VREG_L16B_1P2	H2	PO	1.2V~1.3V, 1.2V typ
VREG_L17B_1P8	N2	PO	WCD_VDD_BUCK, 1.8V~1.9V, 1.8V typ
VREG_SYS_1P8	L1	PO	System 1.8 V I/O output
VIB_DRV_P	F2	PO	Power supply for haptics driver
GND	A3,A4,A9,A14,A16,A17 ,A18,A20,A21,A23,A24, A26,B3,B4,B9,B14,B16 ,B17,B18,B21,B22,B23, B24,B25,B26,C14,C16, C17,C18,C21,C22,C23, C24,C25,C26,C27,C28, D9,D13,D14,D16,D17, D18,D19,D23,D24,D27, E27,E28,F12,F18,F27, F28,G9,G10,G16,G17, G18,G21,H3,H9,H16,	GND	GND

Pin name	Pin #	Type	Description
	H17,H18,H19,H21,J9, J16,Y22,J18,J21,J25, J26,K9,K26,L9,L20,L26 ,M1,M9,M19,M21,M22, M25,M26,N9,N10,N20, N21,N22,N25,N26,P9, P10,P19,P20,P21,P22, P25,R10,R11,R17,R18, R19,R20,R21,R22,T9, T17,T18,T19,U9,U17, U18,U19,V9,V12,V13, V14,V15,V16,V17,V18, V19,W1,Y12,Y13,AA12, AA13,AA14,AA15,AA16 ,AA17,AA23,Y25,AB12, AB19,AC12,AC19,U25, P1,P2,Y24,Y23,GND1, GND2,GND3,GND4, GND5,GND6, BA1,BA2,BA27,BA28, BB1,BB2,BB27,BB28, BC1,BC2,BC5,BC6, BC7,BC8,BC9,BC10, BC11,BC12,BC13, BC14,BC15,BC16, BC17,BC18,BC19, BC20,BC21,BC22, BC23,BC24,BC25, BC26,BC27,BC28, BD3,BD4,BD5,BD6, BD7,BD8,BD9,BD10, BD11,BD12,BD13, BD14,BD15,BD16, BD17,BD18,BD19, BD25,BD26,BE3,BE5, BE6,BE7,BE8,BE9, BE10,BE11,BE12, BE13,BE14,BE15,	GND	GND

Pin name	Pin #	Type	Description
	BE16,BE17,BE18, BE19,BE20,BE25, BE26	GND	GND

2.3.2 Camera interface

SOM supports 5x 4-lane MIPI-CSI interfaces, below table describes pins define

Pin name	Pin #	Volt	Type	Description	Notes
CCI_I2C0_SCL	V21	PX3	DO	Dedicated for camera control I2C (needed PU)	MIPI signals of Camera 0
CCI_I2C0_SDA	V20	PX3	B	Dedicated for camera control I2C (needed PU)	
CAM_MCLK0	M20	CSI	DO	Camera master clock 0	
CSI0_NC_CLK_P	AB26	CSI	AI	MIPI CSI 0 (D-PHY), differential clock – positive	
CSI0_A0_CLK_M	AC26	CSI	AI	MIPI CSI 0 (D-PHY), differential clock – negative	
CSI0_B0_LN0_P	AB25	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 0 – positive	
CSI0_C0_LN0_M	AC25	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 0 – negative	
CSI0_A1_LN1_P	AB24	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 1 – positive	
CSI0_B1_LN1_M	AC24	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 1 – negative	
CSI0_C1_LN2_P	AB23	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 1 – positive	
CSI0_A2_LN2_M	AC23	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 1 – negative	
CSI0_B2_LN3_P	AB22	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 2 – positive	
CSI0_C2_LN3_M	AC22	CSI	AI	MIPI CSI 0 (D-PHY), differential lane 2 – negative	
CCI_I2C1_SCL	V22	PX3	DO	Dedicated for camera control I2C (needed PU)	MIPI signals of Camera 1
CCI_I2C1_SDA	U22	PX3	B	Dedicated for camera control I2C (needed PU)	
CAM_MCLK1	L22	PX3	DO	Camera master clock 1	
CSI1_NC_CLK_P	U28	CSI	AI	MIPI CSI 1 (D-PHY), differential clock – positive	
CSI1_A0_CLK_M	U27	CSI	AI	MIPI CSI 1 (D-PHY), differential clock – negative	
CSI1_B0_LN0_P	V28	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 0 – positive	
CSI1_C0_LN0_M	V27	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 0 – negative	
CSI1_A1_LN1_P	W28	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 1 – positive	
CSI1_B1_LN1_M	W27	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 1 – negative	
CSI1_C1_LN2_P	Y28	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 2 – positive	
CSI1_A2_LN2_M	Y27	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 2 – negative	
CSI1_B2_LN3_P	AA28	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 3 – positive	
CSI1_C2_LN3_M	AA27	CSI	AI	MIPI CSI 1 (D-PHY), differential lane 3 – negative	
CCI_I2C2_SCL	T22	PX3	DO	Dedicated for camera control I2C (needed PU)	Pull Up at Carrier BD
CCI_I2C2_SDA	T21	PX3	B	Dedicated for camera control I2C (needed PU)	
CAM_MCLK2	N19	PX3	DO	Camera master clock 2	
CSI2_NC_CLK_P	M27	CSI	AI	MIPI CSI 2 (D-PHY), differential clock – positive	MIPI
CSI2_A0_CLK_M	M28	CSI	AI	MIPI CSI 2 (D-PHY), differential clock – negative	

Pin name	Pin #	Volt	Type	Description	Notes
CSI2_B0_LN0_P	N27	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 0 – positive	signals of Camera 2
CSI2_C0_LN0_M	N28	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 0 – negative	
CSI2_A1_LN1_P	P27	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 1 – positive	
CSI2_B1_LN1_M	P28	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 1 – negative	
CSI2_C1_LN2_P	R27	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 2 – positive	
CSI2_A2_LN2_M	R28	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 2 – negative	
CSI2_B2_LN3_P	T27	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 3 – positive	
CSI2_C2_LN3_M	T28	CSI	AI	MIPI CSI 2 (D-PHY), differential lane 3 – negative	
CCI_I2C3_SCL	U20	PX3	DO	Dedicated for camera control I2C (needed PU)	Pull Up at Carrier BD
CCI_I2C3_SDA	T20	PX3	B	Dedicated for camera control I2C (needed PU)	
CAM_MCLK3	L21	PX3	DO	Camera master clock 3	
CSI3_NC_CLK_P	G27	CSI	AI	MIPI CSI 3 (D-PHY), differential clock – positive	MIPI signals of Camera 3
CSI3_A0_CLK_M	G28	CSI	AI	MIPI CSI 3 (D-PHY), differential clock – negative	
CSI3_B0_LN0_P	H27	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 0 – positive	
CSI3_C0_LN0_M	H28	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 0 – negative	
CSI3_A1_LN1_P	J27	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 1 – positive	
CSI3_B1_LN1_M	J28	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 1 – negative	
CSI3_C1_LN2_P	K27	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 2 – positive	
CSI3_A2_LN2_M	K28	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 2 – negative	
CSI3_B2_LN3_P	L27	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 3 – positive	
CSI3_C2_LN3_M	L28	CSI	AI	MIPI CSI 3 (D-PHY), differential lane 3 – negative	
CAM_MCLK4	H20	PX3	DO	Camera master clock 4	
CSI4_A0_CLK_M	D25	CSI	AI	MIPI CSI 4 (D-PHY), differential clock – positive	MIPI signals of Camera 3
CSI4_NC_CLK_P	D26	CSI	AI	MIPI CSI 4 (D-PHY), differential clock – negative	
CSI4_C0_LN0_M	E25	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 0 – positive	
CSI4_B0_LN0_P	E26	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 0 – negative	
CSI4_B1_LN1_M	F25	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 1 – positive	
CSI4_A1_LN1_P	F26	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 1 – negative	
CSI4_A2_LN2_M	G25	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 2 – positive	
CSI4_C1_LN2_P	G26	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 2 – negative	
CSI4_C2_LN3_M	H25	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 3 – positive	
CSI4_B2_LN3_P	H26	CSI	AI	MIPI CSI 4 (D-PHY), differential lane 3 – negative	

2.3.3 Display interface

SOM supports 1x 4-lane MIPI-DSI interfaces, below table describes pins define

Pin name	Pin #	Volt	Type	Description	Notes
DSI0_B1_CLK_P	P8	DSI	AO	MIPI DSI 4 (D-PHY), differential clock – positive	MIPI0 signals
DSI0_C1_CLK_M	P7	DSI	AO	MIPI DSI 4 (D-PHY), differential clock – negative	
DSI0_A0_LN0_P	V8	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 0 – positive	

Pin name	Pin #	Volt	Type	Description	Notes
DSI0_B0_LN0_M	V7	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 0 – negative	for MIPI LCM.
DSI0_C0_LN1_P	R8	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 1 – positive	
DSI0_A1_LN1_M	R7	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 1 – negative	
DSI0_A2_LN2_P	U8	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 2 – positive	
DSI0_B2_LN2_M	U7	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 2 – negative	
DSI0_C2_LN3_P	T8	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 3 – positive	
DSI0_NC_LN3_M	T7	DSI	AO	MIPI DSI 4 (D-PHY), differential lane 3 – negative	
EDP0_AUX_P	K7	eDP	B	eDP 1.4 auxiliary channel – positive	
EDP0_AUX_M	K8	eDP	B	eDP 1.4 auxiliary channel – negative	
EDP0_TX0_P	J7	eDP	AO	eDP 1.4 transmit channel 0 – positive	
EDP0_TX0_M	J8	eDP	AO	eDP 1.4 transmit channel 0 – negative	
EDP0_TX1_P	H7	eDP	AO	eDP 1.4 transmit channel 1 – positive	
EDP0_TX1_M	H8	eDP	AO	eDP 1.4 transmit channel 1 – negative	
EDP0_TX2_P	G7	eDP	AO	eDP 1.4 transmit channel 2 – positive	
EDP0_TX2_M	G8	eDP	AO	eDP 1.4 transmit channel 2 – negative	
EDP0_TX3_P	F7	eDP	AO	eDP 1.4 transmit channel 3 – positive	
EDP0_TX3_M	F8	eDP	AO	eDP 1.4 transmit channel 3 – negative	

2.3.4 TouchScreen interface

Touchscreen panels are supported using I2C buses and GPIOs configured as discrete digital inputs

Pin name	Pin #	Volt	Type	Description
SM_GPIO_52	T14	PX3	OD	TP0_SDA
SM_GPIO_53	R15	PX3	OD	TP0_SCL
SM_GPIO_81	N8	PX3	DO	TP0_INT
SM_GPIO_105	J19	PX3	DI	TP0_RST

2.3.5 Audio Interface

The SOM provides sound wire, DMIC and I2S interfaces for audio. Sound wire interface is special for external codec IC, which can build audio functions of the system. DMIC interface can be used to directly connect up to 6 PDM MICs. below table describes pins define

Pin name	Pin #	Volt	Type	Description	Notes
WCD_SWR_TX_CLK	G14	PX3	DO	Sound wire transmit for WCD	SM_GPIO_144
WCD_SWR_TX_DATA0	J13	PX3	DO		SM_GPIO_145
WCD_SWR_TX_DATA1	G15	PX3	DO		SM_GPIO_146
WCD_SWR_TX_DATA3	F15	PX3	DO		SM_GPIO_158
WCD_SWR_RX_CLK	F14	PX3	DI	Sound wire receive for WCD	SM_GPIO_147

Pin name	Pin #	Volt	Type	Description	Notes
WCD_SWR_RX_DATA0	J12	PX3	DI	AUDIO PA Sound wire	SM_GPIO_148
WCD_SWR_RX_DATA1	H13	PX3	DI		SM_GPIO_149
WSA_SWR_CLK	H11	PX3	IO		SM_GPIO_154
WSA_SWR_DATA	G12	PX3	IO		SM_GPIO_155
DMIC01_CLK	J14	PX3	DO		SM_GPIO_150
DMIC01_DATA	H14	PX3	IO		SM_GPIO_151
DMIC23_CLK	J15	PX3	DO		SM_GPIO_152
DMIC23_DATA	H15	PX3	IO		SM_GPIO_153
DMIC45_CLK	F16	PX3	DO		SM_GPIO_156
DMIC45_DATA	F17	PX3	IO		SM_GPIO_157
PRI_MI2S_MCLK	R4	PX3	DO	Primary MI ² S master clock	SM_GPIO_96
MI2S0_SCK	P4	PX3	DO		SM_GPIO_97
MI2S0_DATA0	N4	PX3	B		SM_GPIO_98
MI2S0_DATA1	M4	PX3	B		SM_GPIO_99
MI2S0_WS	R9	PX3	B		SM_GPIO_100
MI2S2_SCK	N7	PX3	B		SM_GPIO_101
MI2S2_DATA0	R3	PX3	B		SM_GPIO_102
MI2S2_WS	L4	PX3	B		SM_GPIO_103
MI2S2_DATA1	J3	PX3	B		SM_GPIO_104
SEC_MI2S_MCLK	J19	PX3	DO B	MI2S1	SM_GPIO_105
MI2S1_DATA1					
MI2S1_SCK					
MI2S1_DATA0					
MI2S1_WS					
LPI_QUA_MI2S_SCK	G14	PX3	B	LPI MI2S 4 lanes	SM_GPIO_144
LPI_QUA_MI2S_WS	J13	PX3	B		SM_GPIO_145
LPI_QUA_MI2S_DATA0	G15	PX3	B		SM_GPIO_146
LPI_QUA_MI2S_DATA1	F14	PX3	B		SM_GPIO_147
LPI_QUA_MI2S_DATA2	J12	PX3	B		SM_GPIO_148
LPI_QUA_MI2S_DATA3	H13	PX3	B		SM_GPIO_149
LPI_I2S1_CLK	J14	PX3	B		SM_GPIO_150
LPI_I2S1_WS	H14	PX3	B	LPI I2S1	SM_GPIO_151
LPI_I2S1_DATA0	J15	PX3	B		SM_GPIO_152
LPI_I2S1_DATA1	H15	PX3	B		SM_GPIO_153
LPI_I2S2_CLK	H11	PX3	B		SM_GPIO_154
LPI_I2S2_WS	G12	PX3	B	LPI I2S2	SM_GPIO_155
LPI_I2S2_DATA0	F16	PX3	B		SM_GPIO_156
LPI_I2S2_DATA1	F17	PX3	B		SM_GPIO_157

2.3.6 USB & DisplayPort interface

The SOM supports 1x USB 3.1 GEN1, with Type-C with DisplayPort and 1x USB2.0.

Pin name	Pin #	Type	Description	Notes
PM_USB_OPTION	G2	AI	Used to select different PON options based on pull-down (PD) resistor value Configuration selection for micro-USB and Type-C connectors. Float for Type-C and connect to ground with 0 Ohm for micro USB.	
USB_THERM	E1	AI	USB Type-C connector temperature sensor	
USB_SS_H_HS-L_SEL	AA11	DI	Connected to ID Pin of Micro USB. Not supported on SOM by default.	
USB0_CC1	C15	AI, PO	CC1 Pin for the USB Type-C connector or OTG mode enable	
USB0_CC2	D15	AI, PO	CC2 Pin for the USB Type-C connector	
USB0_SBU1	A15	DI	Type-C side band signal SBU1; protected to 22 V max.	
USB0_SBU2	B15	DO	Type-C side band signal SBU2; protected to 22 V max.	
USB0_DP_AUX_P	AB17	AI, AO	DisplayPort auxiliary channel – positive	Native DP
USB0_DP_AUX_M	AC17	AI, AO	DisplayPort auxiliary channel – negative	
USB0_HS_DP	F1	AI, AO	USB 2.0 high-speed data – positive	
USB0_HS_DM	G1	AI, AO	USB 2.0 high-speed data – negative	
USB0_SS_TX0_P	AB14	AO	USB 3.0 Type C PHY transmit 0 – positive	
USB0_SS_TX0_M	AC14	AO	USB 3.0 Type C PHY transmit 0 – negative	
USB0_SS_RX0_P	AB13	AI	USB 3.0 Type C PHY receiver 0 – positive	
USB0_SS_RX0_M	AC13	AI	USB 3.0 Type C PHY receiver 0 – negative	
USB0_SS_TX1_P	AB15	AO	USB 3.0 Type C PHY transmit 1 – positive	
USB0_SS_TX1_M	AC15	AO	USB 3.0 Type C PHY transmit 1 – negative	
USB0_SS_RX1_P	AC16	AI	USB 3.0 Type C PHY receiver 1 – positive	
USB0_SS_RX1_M	AB16	AI	USB 3.0 Type C PHY receiver 1 – negative	
USB1_HS_DP	AC18	AI, AO	USB1_HS – positive	USB1 2.0
USB1_HS_DM	AB18	AI, AO	USB1_HS – negative	

2.3.7 PCIe interface

The SOM supports one Peripheral Component Interconnect Express (PCIe) interfaces, which can be used for general-purpose peripherals.

Pin name	Pin #	Voltage	Type	Description
PCIE1_REFCLK_P	AC11	PCIe	AI,AO	PCIe 1 Gen 3 reference clock – positive
PCIE1_REFCLK_M	AB11	PCIe	AI,AO	PCIe 1 Gen 3 receive lane 0 – negative
PCIE1_TX0_P	AC7	PCIe	AO	PCIe 1 Gen 3 Transmit lane 0– positive
PCIE1_TX0_M	AB7	PCIe	AO	PCIe 1 Gen 3 Transmit lane 0– negative
PCIE1_RX0_P	AC8	PCIe	AI	PCIe 1 Gen 3 receive lane 0 – positive
PCIE1_RX0_M	AB8	PCIe	AI	PCIe 1 Gen 3 receive lane 0 – negative
PCIE1_TX1_P	AC9	PCIe	AO	PCIe 1 Gen 3 Transmit lane 1– positive
PCIE1_TX1_M	AB9	PCIe	AO	PCIe 1 Gen 3 Transmit lane 1– negative
PCIE1_RX1_P	AC10	PCIe	AI	PCIe 1 Gen 3 receive lane 1 – positive
PCIE1_RX1_M	AB10	PCIe	AI	PCIe 1 Gen 3 receive lane 1 – negative
PCIE1_CLK_REQ_N	Y16	PX3	DI	PCIe Clock request
PCIE1_RESET_N	Y14	PX3	DO	PCIe reset signal
PCIE1_WAKE_N	Y15	PX3	DI	PCIe wake up signal
PCIE0_TX_M	BD23	PCIe	AO	PCIe 0 Gen 3 Transmit lane– negative
PCIE0_RX_P	BE24	PCIe	AI	PCIe 0 Gen 3 receive lane– positive
PCIE0_RX_M	BD24	PCIe	AI	PCIe 0 Gen 3 receive lane– negative
PCIE0_RESET_N	BE21	PX3	DO	PCIe reset signal
PCIE0_WAKE_N	BD21	PX3	DI	PCIe wake up signal
PCIE0_TX_P	BE23	PCIe	AO	PCIe 0 Gen 3 Transmit lane– positive
PCIE0_REFCLK_P	BE22	PCIe	AI,AO	PCIe 0 Gen 3 reference clock – positive
PCIE0_REFCLK_M	BD22	PCIe	AI,AO	PCIe 0 Gen 3 receive lane 0 – negative
PCIE0_CLK_REQ_N	BD20	PX3	DI	PCIe Clock request

2.3.8 SDIO interface

The SOM supports 1 x 4-lane SDIO, SDC2 connected to SD card.

The SDIO is a high-speed signal group. It should protect other sensitive signals/circuits from SD corruption, and protect SD signals from noisy signals (clock, RF and so on)

- The clock can be up to 200 MHz
- The signals routing should be $50\Omega \pm 10\%$ impedance control.
- CLK to DATA/CMD length matching less than 1mm.
- The spacing to all other signals should 2X line width
- Maximum bus capacitance less than 1.0pF.
- Each trace needs to be next to a ground plane.

Pin name	Pin #	Volt.	Type	Description	Notes
VREG_L9C_2P96	Y5	-	PO	SD Card Power Supply	
VREG_L6C_2P96	Y4	-	PO	SD Card pull up power	
SDC2_CLK	T10	PX2	DO	SD controller 2 clock	
SDC2_CMD	T11	PX2	DO-NP:pdpukp	SD controller 2 command	
SDC2_DATA_0	V11	PX2	BH-NP:pdpukp	SD controller 2 data bit 0	
SDC2_DATA_1	U10	PX2	BH-NP:pdpukp	SD controller 2 data bit 1	
SDC2_DATA_2	V10	PX2	BH-NP:pdpukp	SD controller 2 data bit 2	
SDC2_DATA_3	U11	PX2	BH-NP:pdpukp	SD controller 2 data bit 3	
SD_CARD_DET_N	M10	PX3	BH-NP:pdpukp	Insert detection	SM_GPIO_91

2.3.9 SSC interface

The SOM has an integrated sensor subsystem called Snapdragon™ sensor core (SSC), which is dedicated to support low-power, always-on use cases.

The sensor subsystem can be left powered on even when the rest of the MSM device is in sleep mode.

The SSC core has dedicated I/O to communicate with the sensors. The I/O can support I2C and SPI interfaces.

Pin name	Pin #	Volt.	Type	Description	Notes
SNS_I3C0_SDA	K10	PX3	BIO	These I3C signals are dedicated to Sensor	SM_GPIO_159
SNS_I3C0_SCL	L10	PX3	BIO		SM_GPIO_160
SNS1_I2C_SDA	H10	PX3	BIO	These I2C signals are dedicated to Sensor	SM_GPIO_161
SNS1_I2C_SCL	J10	PX3	BIO		SM_GPIO_162
SM_GPIO_163	J11	PX3	BIO	Snapdragon™ Sensor Core SPI signals	SM_GPIO_163
SM_GPIO_164	H12	PX3	BIO		SM_GPIO_164
SM_GPIO_165	F13	PX3	BIO		SM_GPIO_165
SM_GPIO_166	G13	PX3	BIO		SM_GPIO_166

2.3.10 QUP interface

These GPIOs are available as QUP (Qualcomm universal peripheral) interface ports that can be configured for UART, SPI, I2C or I3C operation.

I2C is a two-wire bus that can be routed to multiple devices; each line of each bus needs to be supplemented by a 2.2 KΩ pull-up resistor.

Pin name	Pin #	Volt.	Type	Description	Notes
SM_GPIO_0	G19	PX3	BIO	QU0 SE0 Lane0/1	
SM_GPIO_1	G20	PX3	BIO		
PCIE1_RESET_N	Y14	PX3	BIO	QU0 SE0 Lane2/3	SM_GPIO_2
PCIE1_WAKE_N	Y15	PX3	BIO	QU0 SE7 Lane4/5	SM_GPIO_3
APPS_I2C_SDA	Y18	PX3	BIO	QU0 SE1 Lane0/1	SM_GPIO_4

Pin name	Pin #	Volt.	Type	Description	Notes
APPS_I2C_SCL	Y17	PX3	BIO		SM_GPIO_5
SM_GPIO_6	K21	PX3	BIO	QUP0 SE0 Lane2 QUP0 SE7 Lane6	
SM_GPIO_7	K25	PX3	BIO	QUP0 SE1 Lane3	
SM_GPIO_8	L25	PX3	BIO	QUP0 SE2 Lane0/1	
SM_GPIO_9	R25	PX3	BIO		
SM_GPIO_12	D22	PX3	BIO	QUP0 SE3	
SM_GPIO_13	C19	PX3	BIO		
SM_GPIO_14	D21	PX3	BIO		
SM_GPIO_15	D20	PX3	BIO		
SM_GPIO_16	H22	PX3	BIO		
SM_GPIO_17	J22	PX3	BIO	QUP0 SE4	
SM_GPIO_18	F22	PX3	BIO		
SM_GPIO_19	G22	PX3	BIO		
SM_GPIO_20	AA24	PX3	BIO		
SM_GPIO_21	AB21	PX3	BIO	QUP0 SE5	
DBG_UART_TX	AB20	PX3	BIO		SM_GPIO_22
DBG_UART_RX	AC20	PX3	BIO		SM_GPIO_23
SM_GPIO_24	V26	PX3	BIO		
SM_GPIO_25	Y26	PX3	BIO	QUP0 SE6	
SM_GPIO_26	U26	PX3	BIO		
SM_GPIO_27	W26	PX3	BIO		
SM_GPIO_32	L19	PX3	BIO		
SM_GPIO_33	R12	PX3	BIO	QUP1 SE0	
SM_GPIO_34	T12	PX3	BIO		
SM_GPIO_35	R13	PX3	BIO		
SM_GPIO_36	T15	PX3	BIO		
SM_GPIO_37	T16	PX3	BIO	QUP1 SE1	
SM_GPIO_38	U15	PX3	BIO		
SM_GPIO_39	U16	PX3	BIO		
SM_GPIO_40	M3	PX3	BIO		
SM_GPIO_41	N3	PX3	BIO	QUP1 SE2	
SM_GPIO_42	K2	PX3	BIO		
SM_GPIO_43	H1	PX3	BIO		
SM_GPIO_44	T13	PX3	BIO		
SM_GPIO_45	U12	PX3	BIO	QUP1 SE3	
SM_GPIO_46	R14	PX3	BIO		
SM_GPIO_47	U13	PX3	BIO		

Pin name	Pin #	Volt.	Type	Description	Notes
SM_GPIO_48	P3	PX3	BIO	QUP1 SE4	
SM_GPIO_49	K1	PX3	BIO		
SM_GPIO_50	L2	PX3	BIO		
SM_GPIO_51	M2	PX3	BIO		
SM_GPIO_52	T14	PX3	BIO	QUP1 SE5	
SM_GPIO_53	R15	PX3	BIO		
SM_GPIO_54	U14	PX3	BIO		
SM_GPIO_55	R16	PX3	BIO		
SM_GPIO_56	R1	PX3	BIO	QUP1 SE6	
SM_GPIO_57	R2	PX3	BIO		
SM_GPIO_58	T2	PX3	BIO		
SM_GPIO_59	T1	PX3	BIO		
SM_GPIO_60	AC6	PX3	BIO	QUP1 SE7 Lane0/1	
SM_GPIO_61	AB5	PX3	BIO		
SM_GPIO_62	AA6	PX3	BIO	QUP1 SE7 Lane2/SE6 Lane4	
SM_GPIO_63	AC5	PX3	BIO	QUP1 SE6 Lane3/SE6 Lane5	

2.3.11 Debug UART interface

Pin name	Pin #	Volt.	Type	Description	Notes
DBG_UART_TX	AB20	PX3	DO	QUP0 SE5 UART signals, can use	SM_GPIO_22
DBG_UART_RX	AC20	PX3	DI	for debug	SM_GPIO_23

2.3.12 Power on interface

Dedicated PMIC circuits continuously monitor events that might trigger a power-on sequence. If an event occurs, these circuits power on the IC, determine the available power sources of the device, and enable the correct source. Press the KPD_PWR_N for ~2 s to boot the system properly. Power on/off key signal can be connected to ground through SOM Pin M8, PHONE_ON_N (200 KΩ internally pulled up to 1.1 V).

Pin name	Pin #	Volt.	Type	Description	Notes
PHONE_ON_N	M8	-	DI	Power-on key ground switch (200 KΩ internal PU to 1.1 V)	

2.3.13 Reset interface

You can generate a mandatory reset by a long key press of RESIN_N, KPD_PWR_N, or RESIN_N plus KPD_PWR_N in combination.

Pin name	Pin #	Volt.	Type	Description	Notes
PM_RESIN_N	L8	-	DI	Volume down/Reset key signal, Low active (40 KΩ internal PU to 1.8 V)	

2.3.14 Keys interface

Pin name	Pin #	Volt.	Type	Description	Notes
PM_RESIN_N	L8	-	DI	Volume down/Reset key signal, Low active (40 KΩ internal PU to 1.8 V)	
PHONE_ON_N	M8	-	DI	Power-on key ground switch (200 KΩ internal PU to 1.1 V)	
KYPD_VOL_UP_N	L7	-	DI	Keypad volume up button	

2.3.15 Battery interface

Battery interfaces are special for battery interface, major for monitoring battery status, inserting and voltage detection

Pin name	Pin #	Volt.	Type	Description	Notes
BATT_THERM	C6	1.875V max	AI	Battery temperature input to ADC for measuring the pack temperature. Used for charger safe operation and BMS. 100K pull down, or connect to Battery	
BATT_ID	C4	1.875V max	AI	Battery ID input to the ADC interface. Used for missing battery detection. 100K pull down, or connect to Battery	
VBATT_VSNS_P	E3	-	AI	Battery voltage sense input plus. Connect to the battery positive remote sense node or connect this directly to the battery positive node.	
VBATT_VSNS_M	F3	-	AI	Battery voltage sense input minus. Connect to the battery negative remote sense node or connect this directly to the battery negative node.	
VBATT_PACK_SNS_M	C5	-	AI	Battery voltage sense input minus. Directly to the battery negative node (pack negative).	
VBATT_OPT_ISNS_P	D4	-	AI	Reserved	
VBATT_OPT_ISNS_M	D6	-	AI	Reserved	

2.3.16 PMIC GPIO

The PMICs provide GPIO with different functions. below table describes pins define

of each PMIC GPIO

PMK7325

Pin name	Pin #	Volt.	Type	Description	Notes
PMK_GPIO_01	V25	LV	B	Configurable; default digital input with 10µA pull-down	AMUX SMB_SPMI_CLK
PMK_GPIO_02	W25	LV	B	Configurable; default digital input with 10µA pull-down	AMUX SMB_SPMI_DATA

PM7250B

Pin name	Pin #	Volt.	Type	Description	Notes
PM_A_GPIO_01	F10	LV	B	Configurable; default digital input with 10µA pull-down Interrupt	PM7250B_GPIO_1
PM_A_GPIO_02	G4	LV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_2
PM_A_GPIO_03	F9	LV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_3
PM_A_GPIO_04	G3	LV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_4
PM_A_GPIO_05	C9	MV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_5
PM_A_GPIO_06	D5	MV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_6
PM_A_GPIO_07	F4	MV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_7
PM_A_GPIO_08	E2	MV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_8
PM_A_GPIO_09	D8	LV	B	Configurable; default digital output, open drain	PM7250B_GPIO_9
PM_A_GPIO_10	G11	LV	B	Configurable; default digital output, open drain	PM7250B_GPIO_10
PM_A_GPIO_11	E4	LV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_11
PM_A_GPIO_12	F11	LV	B	Configurable; default digital input with 10µA pull-down	PM7250B_GPIO_12

PM7325

Pin name	Pin #	Volt.	Type	Description	Notes
PM_B_GPIO_08	J4	MV	B	Configurable; default digital input with 10µA pull-down	PM7325_GPIO_08
PM_B_GPIO_09	K4	MV	B	Configurable; default digital input with 10µA pull-down	PM7325_GPIO_09
PM_B_AMUX2	K3		AI	Analog multiplexer (AMUX) input 2	AMUX_2
PM_B_AMUX4	L3		AI	Analog multiplexer (AMUX) input 4	AMUX_4

PM7350C

Pin name	Pin #	Volt.	Type	Description	Notes
PM_C_GPIO_01	W2	LV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_02	V4	LV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_03	W5	LV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_04	Y6	LV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_05	T3	MV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_06	V1	MV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_07	U1	MV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_08	U4	MV	B	Configurable; default digital input with 10µA pull-down	
PM_C_GPIO_09	T4	MV	B	Configurable; default digital input with 10µA pull-down	

2.3.17 PWMs and LED current driver interface

The SOM has two PWM outputs and three LED Current Drivers

Pin name	Pin #	Volt.	Type	Description	Notes
PWM signals					
PM_C_GPIO_08	U4	MV	DO	Can be configured as GPIO and PWM (only GPIO_08 is available for fixed duty cycle variable frequency mode)	
PM_C_GPIO_09	T4	MV	DO		

Pin name	Pin #	Volt.	Type	Description	Notes
LED signals					
IRIS_RED	AA3	-	AO	Independent high-side current source brightness control of Red, Green, and Blue channels, 12 mA maximum per channel	
IRIS_GREEN	AA4	-	AO		
IRIS_BLUE	Y3	-	AO		
FLASH LED signals					
FLASH_LED1	AA1,AA2	-	AO	Flash high-side current source	
FLASH_LED2	Y1,Y2	-	AO		

2.3.18 RF interface

The SOM provides the fully-integrated WLAN and Bluetooth function

Antenna Interface

Pin Name	Pin #	Description	Notes
ANT_2G_5G_CH0	A25	Antenna 1 supports Wi-Fi 2.4G/BT	Chain 0
ANT_2G_5G_CH1	D28	Antenna 2 supports Wi-Fi 2.4G/BT (selectable)	Chain 1
ANT_BT_3RD	A22	Reserved for BT standalone antenna in 3-antenna solution	-
RF_ANT_GNSS	BE4	Antenna supports GPS	-

WCN interface

Pin Name	Pin #	Description	Notes
WCN_SDR_N79_TO_TXEN	J24	This pin is an input from the SDR to the WCN6750. This GPIO is set high by the SDR when N79 transmits above a prescribed RF power. The WCN6750 can be configured to respond to this GPIO when operating below a certain channel number, and to ignore this GPIO when operating above a certain channel number. When the WCN6750 responds to this GPIO, it places the 5 GHz receivers in a protected state to prevent damage.	
WCN_SDR_TXEN_TO_N79	K24	This is an output from the WCN6750 to the SDR. The WCN6750 asserts this GPIO to high state when the 5 GHz or 6 GHz chains are transmitting about certain power, and below a configurable channel frequency. The intent of allowing the channel to be configured is to improve concurrency with N79, depending on the filter selected and used on the device.	
WCN_SDR_LAA_TO_TXEN	L24	This is an input from the SDR to the WCN6750. The SDR sets GPIO high if LAA is transmitting. GPIO is monitored	

Pin Name	Pin #	Description	Notes
		by WCN6750. When it goes high, WCN6750 places the 5 GHz receiver in a protected state. SRD sets high when LAA transmits at 10 dBm or higher. This pin is monitored even in sleep mode, as long as the 0.8 V AON domain is powered.	

2.4 Pin Summary

(TBD)

CRI Preliminary Datasheet

3. Electrical Characteristics

3.1 Absolute Maximum Ratings

The absolute maximum ratings in which the SOM input power sources can be exposed to without experiencing functional failure.

Function	Min	Max	Unit
Battery or DC power input (RB5_SOM_4.2V)	-0.3	6	V
USB VBUS input voltage source (USB_VBUS)	-0.3	28	V

3.2 Operating conditions

The recommended operating conditions for the SOM to meet all performance specifications (provided the absolute maximum ratings have never been exceeded)

Function	Min	Typ.	Max	Unit
Battery or DC power input (RB5_SOM_4.2V)	3.45	3.8	4.8	V
USB VBUS input voltage source (USB_VBUS)	3.6	5	12	V

3.3 Output Power

The SOM provide power supply for external device, like camera module, SD card, Sensor, and so on. Below map show the details

Function	Pin #	Volt(V)	Range (V)	Usage
VPH_PWR	C1,C2,C3 D1,D2,D3	-	+3.2~4.75	Primary system supply node
VREG_BOB	AB3,AC3	+3.3	-	Buck-boost output 3.3V@1A
VREG_L18B_1P8	A19,B19	+1.8	+1.8~2.0	PX3, 1.8V for GPIO Pull-up
VREG_L2C_1P8	W4	+1.8	+1.62~1.98	MEMS_DMIC_VDD, 1.8V typ
VREG_L3C_3P0	AA5	+3.008	+2.8~3.54	Touch screen, 3V typ
VREG_L7C_3P0	AB4	+3.008	+2.8~3.54	Sensors, 3V typ
VREG_L8C_1P8	AC4	+1.8	+1.8~2.0	Sensors, 1.8V typ
VREG_L11C_2P8	W3	+2.8	+2.8~3.54	Connectivity, 2.8V typ
VREG_L12C_1P8	U2	+1.8	+1.8~1.98	OLED VDDIO, 1.8V typ
VREG_L13C_3P0	U3	+3.0	+2.7~3.54	OLED VCI, 2.8v typ
VREG_L16B_1P2	H2	+1.2	+1.2~1.3	1.2V typ
VREG_L17B_1P8	N2	+1.8	+1.8~1.9	WCD_VDD_BUCK, 1.8V typ
VREG_SYS_1P8	L1	-	+1.75~1.86	System 1.8V I/O output
VIB_DRV_P	F2	TBD	TBD	Power supply for haptics driver

3.4 GPIO characteristics

The below table shows the GPIO characteristics (VDDPX3=1.8V)




Parameter	Description	Min	Max	Unit
V_{IH}	High-level input voltage, CMOS/Schmitt	VDDPX3 x0.7	VDDPX3 +0.3	V
V_{IL}	Low-level input voltage, CMOS/Schmitt	-0.3	VDDPX3 x0.3	V
V_{SHYS}	Schmitt hysteresis voltage	300	-	mV
V_{OH}	High-level output voltage, CMOS	VDDPX3 -0.45	VDDPX3	V
V_{OL}	Low-level output voltage, CMOS	0.0	0.45	V
$R_{PULL-UP}$	Pull-up resistance	20	60	KΩ
$R_{PULL-DOWN}$	Pull-down resistance	20	60	KΩ

The below table shows the SD card IO characteristics (VDDPX2=1.8V / 2.96V)

Parameter	Description	Min	Max	Unit
V_{IH}	High-level input voltage, CMOS/Schmitt	1.27/ DDPX2 x0.625	2,0/ VDDPX2 +0.3	V
V_{IL}	Low-level input voltage, CMOS/Schmitt	-0.3/ -0.3	0.58/ VDDPX2 x0.25	V
V_{SHYS}	Schmitt hysteresis voltage	100	-	mV
V_{OH}	High-level output voltage	1.4/ VDDPX2 x0.75	-/ VDDPX2	V
V_{OL}	Low-level output voltage	0/ 0	0.45/ VDDPX2 x0.125	V
$R_{PULL-UP}$	Pull-up resistance	10	100	KΩ
$R_{PULL-DOWN}$	Pull-down resistance	10	100	KΩ

4. Mechanical Specification

4.1 SOM Mechanical dimensions

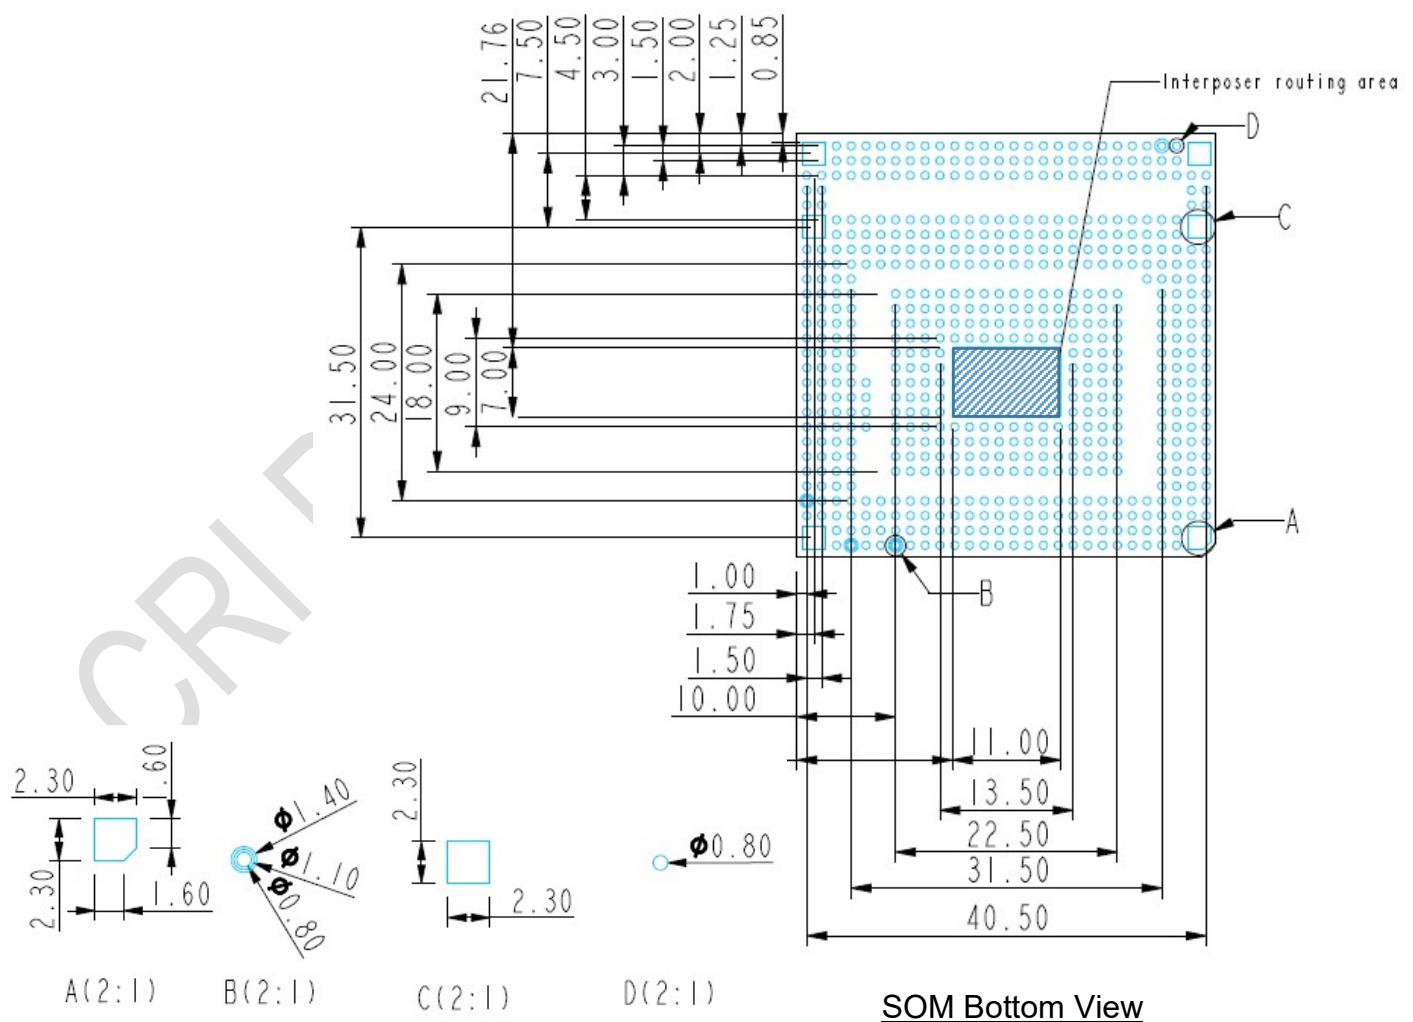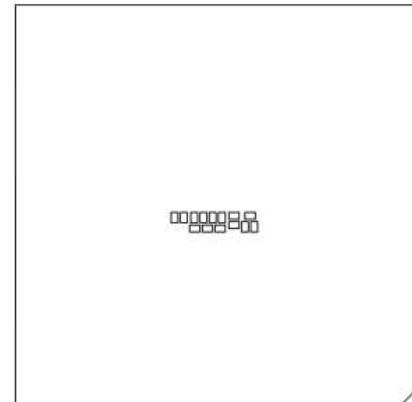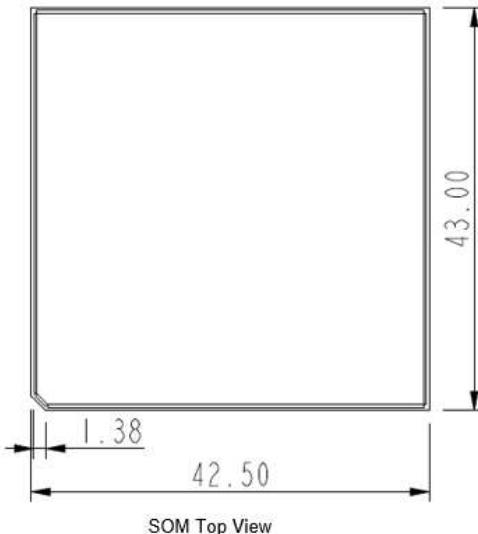

4.2 Weight

The SOM weighs approximately 13 +/- 2 g

4.3 Thermal Characteristics

(TBD)

CRI Preliminary Datasheet

5. Product Marking, Ordering and Shipping Info.

CRI/Preliminary Datasheet